

08-24-00

A

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))		Attorney Docket No. 2000-1220-RA
First Inventor or Application Identifier Kachnic et al.		
Title PART FORMING MACHINE CONTROLLER HAVING		
Express Mail Label No. EL573255711US		

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.		ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231			
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input checked="" type="checkbox"/> * Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other:			
2. <input checked="" type="checkbox"/> Specification [Total Pages 33] (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies				
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 6]					
4. Oath or Declaration [Total Pages 3] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).					
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).					
16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: _____ Prior application information: Examiner _____ Group / Art Unit: _____ For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.					
17. CORRESPONDENCE ADDRESS <input type="checkbox"/> Customer Number or Bar Code Label _____ or <input checked="" type="checkbox"/> Correspondence address below (Insert Customer No. or Attach bar code label here)					
Name	Joel D. Myers, Esq. Myers & Associates,				
Address	Intellectual Property Law, P.C. 5763 Mason Jones Drive				
City	Powder Springs			State	GA
Country	USA	Zip Code	30127		
Telephone	770-222-2506	Fax	770-222-2506		

Name (Print/Type)	Joel D. Myers	Registration No. (Attorney/Agent)	44,253
Signature	<i>Joel D. Myers</i>	Date	08-23-00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN

Docket Number (Optional)
 2000-1220-RA

Applicant, Patentee, or Identifier: Kachnic et al.
 Application or Patent No.: Filed Herewith
 Filed or Issued: Filed Herewith
 Title: PART FORMING MACHINE CONTROLLER HAVING INTEGRATED
SENSORY AND ELECTRONICS AND METHOD THEREOF

I hereby state that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN AVALON Vision Solutions, LLC

ADDRESS OF SMALL BUSINESS CONCERN 422 Thornton Road, Suite 104
Lithia Springs, Georgia, 30122

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

- Each person, concern, or organization having any rights in the invention is listed below:
☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Edward F. Kachnic

TITLE OF PERSON IF OTHER THAN OWNER President

ADDRESS OF PERSON SIGNING 4006 Hickory Nut Drive, Douglasville, GA 30135

SIGNATURE Edward F. Kachnic DATE 08-16-00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket # 2000-1220-RA

August 23, 2000


In re Application of: Kachnic, et al.
Filed: Herewith
Serial Number:
For: PART FORMING MACHINE CONTROLLER HAVING INTEGRATED SENSORY
AND ELECTRONICS AND METHOD THEREOF

Assistant Commissioner For Patents
Box: New Patent Application
Washington, D.C. 20231

Please find enclosed for filing the above referenced
nonprovisional patent application along with the items listed on
the return receipt postcard.

Thank you for your time and attention.

Sincerely,

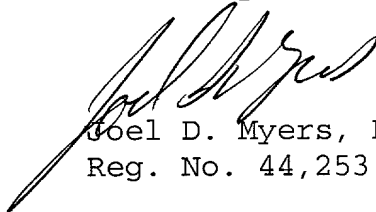
Joel D. Myers, Esq.
Reg. No. 44,253

Myers & Associates
Intellectual Property Law, P.C.
5763 Mason Jones Drive
Powder Springs, GA 30127
770-222-2506
Email: myersioplawaol.com


CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States
Postal Service as:

Express Mail - Label No.: ELS732557/145

in an envelope addressed to: Assistant Commissioner for Patents, Washington, DC 20231 on:

August 23, 2000
(Date)
Joel D. Myers
(Name of Person Mailing)

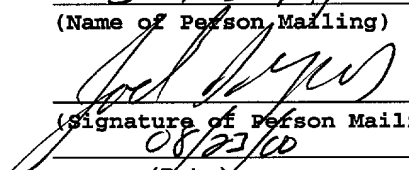
(Signature of Person Mailing)
08/23/00
(Date)

APPLICATION FOR LETTERS PATENT
UNITED STATES OF AMERICA

Be it known that I, Edward Kachnic, residing at 4026 Hickory Nut Drive, Douglasville, Georgia 30135, a citizen of the United States, and I, Benjamin Pryhoda, residing at 530 Arbor Drive, Lafayette, Colorado 80026, have invented certain new and useful improvements in a

PART FORMING MACHINE CONTROLLER HAVING INTEGRATED SENSORY
AND ELECTRONICS AND METHOD THEREOF

of which the following is a specification.

MYERS & ASSOCIATES
INTELLECTUAL PROPERTY LAW, P.C.
1950 Spectrum Circle, Suite 400
Marietta, Georgia 30067
770-222-2506
Email: myersiplaw@aol.com

**PART FORMING MACHINE CONTROLLER HAVING INTEGRATED SENSORY
AND ELECTRONICS AND METHOD THEREOF**

This application claims the benefit under 35 U.S.C. 119(e)
of U.S. provisional application number 60/212518, filed on June
19, 2000.

TECHNICAL FIELD

The present invention relates generally to part forming
machines and more specifically to a part forming machine
controller having integrated sensory and electronics. The
present invention further relates to a method of forming parts
and using integrated sensory to detect the presence, absence and
quality of parts within a mold.

BACKGROUND OF THE INVENTION

The parts forming industry is one of the world's largest
industries in both total revenue and employment. As a multi-

1 billion dollar industry, even small improvements to the
manufacturing process can prove to have an enormous production
efficiency and thus financial impact. Numerous methods and
machines have been designed for forming parts. For instance, parts
5 are generally formed via molds, dies and/or by thermal shaping,
wherein the use of molds is presently the most widely utilized.
There are many methods of forming a part via a mold, such as, for
exemplary purposes only, stretch-blow molding, extrusion blow
molding, injection blow molding, vacuum molding, rotary molding and
10 injection molding.

One typical method of forming hollow containers is via a
widely utilized process known as stretch blow-molding, wherein
typically a three piece mold having two opposing side members and a
bottom/push-up mold is utilized. Commonly, an injection molded
preform, shaped generally like a test tube (also known as the
parison), is inserted into the top of the mold. A rod is inserted
inside the parison and is utilized to extend the parison to the
bottom of the mold, upon which compressed air is forced into the
20 parison, thus stretching the parison outward first toward the
approximate center of the side mold members and then over and
around the push-up/bottom mold. The parison is generally amorphous
prior to initiating the blow process; however, after stretching the
parison, the molecules align thereby forming a container having
25 high tensile strength.

In many automated injection molding systems, ejector apparatus are provided to dislodge and push the hard plastic parts out of the mold cavities. A typical ejector apparatus includes one or more elongated ejector rods extending through a mold half into the cavity or cavities and an actuator connected to the rod or rods for sliding or stroking them longitudinally into the cavity or cavities to push the hard plastic part or parts out of the cavity or cavities. However, other kinds of ejector apparatus, such as robotic arms, scrapers, or other devices may also be used. Such ejectors are usually quite effective for dislodging and pushing hard plastic parts out of mold cavities, but they are not foolproof. It is not unusual for an occasional hard plastic part to stick or hang-up in a mold cavity in spite of an actuated ejector. One quite common technique is to design and set the ejectors to actuate or stroke multiple times in rapid succession, such as four or five cycles each time a hard plastic part is to be removed, so that if a part sticks or is not removed from a mold cavity the first time it is pushed by an ejector, perhaps it can be dislodged by one or more subsequent hits or pushes from the ejectors. Such multiple ejector cycles are often effective to dislodge and clear the hard molded plastic parts from the molds. Disadvantages of multiple ejector cycling, however, include the additional time required for the multiple ejector cycling each time the mold is opened to eject a hardened plastic part before it is closed for injection

of a subsequent part and the additional wear and tear on the ejector equipment and the molds occasioned by such multiple cycling. Over the course of days, weeks, and months of injection molding parts in repetitive, high volume production line
5 operations, such additional time, wear, and tear can be significant production quantity and cost factors.

On the other hand, stuck or incompletely ejected hard plastic parts can also cause substantial damage to molds and lost
10 production time. In most injection mold production lines, the injection molding machines operate automatically, once the desired mold is installed, in continuous repetitive cycles of closing the mold halves together, heating them, injecting liquid or molten plastic into the mold cavities, cooling to cure or harden the plastic in the mold into hard plastic parts, opening
15 or separating the mold halves, ejecting the molded hard plastic parts, and closing the mold halves together again to mold another part or set of parts. Very high injection pressures are required to inject the liquid or molten plastic into the mold cavities to
20 completely fill all portions of the cavities in a timely manner, and such high pressures tend to push the mold halves apart during injection of the plastic. To prevent such separation of the mold halves during plastic injection, most injection molding machines have very powerful mechanical or hydraulic rams to push and hold
25 the mold halves together. If a hard plastic part from the

previous cycle is not ejected and completely removed from between the mold halves, the powerful mechanical or hydraulic rams will try to close the mold halves onto the hard plastic part, which can and often does damage one or both of the mold halves. Molds are usually machined very precisely from stainless steel or other hard metal, so they are very expensive to replace, and the down-time required to change them is also costly in labor and lost production. It is also not unusual for some of the plastic in a mold cavity to break apart from the rest of the part being molded in the cavity and remain in the mold cavity when the rest of the molded part is ejected. Such remaining material will prevent proper filling and molding of subsequent parts in the cavity, thus causing the subsequent molded parts to be defective. In automated production lines, substantial numbers of such defective parts can be produced before someone detects them and shuts down the injection molding machine for correction of the problem.

To avoid such mold damage, down-time, and defective molded parts as described above, various technologies have also been developed and used to sense or determine whether the hard molded plastic parts have indeed been dislodged and completely ejected or removed from the molds before the mechanical or hydraulic rams are allowed to close. Such technologies have included light beam sensors, vision systems, air pressure sensors, vacuum sensors, and others. U.S. Patent No. 4,841,364 issued to Kosaka et al. is

exemplary of a vision system in which video cameras connected to a vision system controller take video images of the open mold halves for computerized comparison to video images of the empty mold halves stored in memory to detect any unremoved plastic parts or residual plastic material in the mold halves. U.S. Patent No. 4,236,181 issued to Shibata et al. is also an example of a vision system wherein photosensors are provided on a face plate of a CRT to electrically detect if a part has been removed.

U.S. Patent No. 4,603,329 issued to Bangerter et al. shows an optoelectric sensor system coupled to a controller for sensing presence or absence of the molded plastic parts, while U.S. Patent No. 3,303,537 issued to Mislán uses infrared sensors to detect heat from any plastic that may be retained in the mold. As an improvement to the above systems, U.S. Patent No. 5,928,578 issued to Kachnic et al. provides a skip-eject system for an injection molding machine, wherein the system comprises an electronic camera for acquiring an actual image of an open mold after a part ejector has operated and a controller for comparing such actual image with an ideal image of the open mold to determine if the part still remains in the mold. If so, the controller outputs an ejector signal to actuate the ejector to cycle again. Additionally, the patents to Kachnic et al., Kosaka et al. and Shibata et al. provide a means for inspecting the part for defects.

have left the fixed side of the mold and are present on the moving side of the mold. The second analysis is typically after the molding machine has signaled to the sensory controller that the part ejection portion of the molding cycle is complete. Many
5 times this includes several ejection strokes. The purpose is to verify the absence of parts in the moving side of the mold. If the analysis is affirmative, then it is concluded the moving side of the mold has parts removed. Signal inputs into the machine controller are typically digital outputs from the sensory
10 controller. Signals from the machine controller are typically digital inputs into the sensory controller.

There are many variations to the above example, however all include a sensory controller, sensor input(s) to the sensor controller, analysis of the input data, and a digital
15 input/output resultant scheme to the machine controller. This methodology duplicates the user interface and requires an independent CPU hardware system, digital input/output interface and associated cabling thereby substantially increasing the costs
20 of the system. In addition, as more interfaces, CPUs and cabling are added to a data system, the system becomes inherently less reliable. Moreover, with prior systems, the machine controller polls data input/output from the sensor controller and then waits for the data. In extremely time sensitive automatic cycling
25 systems such as injection molding machines, even slight delays

can affect the overall efficiency of the system and result in substantial increase in the cost of goods.

Therefore, it is readily apparent that there is a need
5 for a part-forming system that can reduce the added costs of having an independent sensor controller and reduce the data processing time of prior systems and thus, improve efficiency. It is, therefore, to the provision of such an improvement that the present invention is directed.

SUMMARY OF THE INVENTION

According to its major aspects and broadly stated, the present invention is a part forming machine controller having integrated sensory and electronics, and a method of forming parts and using integrated sensory to detect the presence, absence and quality of parts within a mold.

20 The present invention replaces the multiple controller systems by incorporating the controller of sensory devices with the part-forming machine controller (typically a personal computer), thereby producing a synergistic combination. More specifically, sensory devices such as, for exemplary purposes
25 only, cameras, infrared sensors, ultrasonic sensors, or other

sensing devices are connected directly to one or more preexisting bus interfaces of the machine controller. By programming the machine controller or loading software therein, the machine controller can receive the input signal(s)/data from the sensory
5 device, analyze the data, provide an output signal to the sensory device and communicate directly and contemporaneously with the machine controller software.

Thus, a feature and advantage of the present invention is to
10 provide a new and improved integrated part-forming controller, wherein the integration of the sensor electronics into the machine controller eliminates the need for an external sensor controller, independent CPU hardware system, duplication of the user interface, digital input/output interfaces, associated
15 cabling and connections. Inherently, this makes the molding system more reliable.

Another feature and advantage of the present invention is to
20 provide a new and improved integrated part-forming controller, that eliminates the need for duplicating user interfaces, independent CPU hardware systems,

Another feature and advantage of the present invention is to provide a new and improved integrated part-forming controller,

that eliminates sensory controllers and thus is inherently more reliable.

Another feature and advantage of the present invention is to provide a new and improved integrated part-forming machine controller, wherein the integration allows the molding machine controller to operate more efficiently by integrating the sensory processing with the entire molding process. The molding machine's controller requests inspection sensor data on demand, the resulting analysis is performed on the molding machine's controller's host CPU(s).

Another feature and advantage of the present invention is to provide a new and improved integrated part-forming machine controller, wherein there is no waiting for polling of digital input/output interface signals from the sensor controller, and thus, the continuation of the molding cycle is more efficient due to closer coupling of the analysis result and the molding process.

Another feature and advantage of the present invention is to provide a new and improved integrated part-forming machine controller, wherein ejection cycle time can be further improved by incorporating the Skip-Eject methods from U.S. Patent No. 5,928,578. More specifically, after each ejection stroke, calls

are made to process and analyze sensory data. If part ejection is confirmed, then further unnecessary ejector strokes are canceled or eliminated from the molding cycle. As such, as an integrated controller, delays between ejection cycles can be
5 reduced.

Another feature and advantage of the present invention is to provide a new and improved integrated part-forming machine, wherein the integration also allows the machine controller to
10 become a quality control inspection station, which detects measures, and sorts formed parts for quality defects. Parts can be inspected on the parting line surface in the mold or removed from the mold via a robotics type device and presented to one or more sensors. Quality data can be processed before or in
15 parallel with the next molding cycle to determine pass or fail of the inspection criteria. Feedback to the molding process can be given to continue, adjust the process, or stop the molding process and wait for manual intervention. Part quality is verified and the overall part forming process is improved by
20 reducing the number of defective parts produced.

These and other objects, features and advantages of the invention will become more apparent to one skilled in the art from the following description and claims when read in light of the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be better understood by reading the Detailed Description of the Preferred and Alternate Embodiments with reference to the accompanying drawing figures, in which like reference numerals denote similar structure and refer to like elements throughout, and in which:

FIG. 1 is a perspective view of a typical injection molding machine equipped with a vision detection system;

FIG. 2 is a partial cross-sectional side elevation view of the injection molding machine of FIG. 1 showing the ejectors retracted;

FIG. 3 is a partial cross-sectional side elevation view of the injection molding machine of FIG. 1 showing the ejectors extended;

FIG. 4 is a diagrammatic representation of the flow logic of a prior art system known as the skip-eject system;

FIG. 5 is a functional block diagram of a control of a prior art system known as the skip-eject system;

FIG. 6 is a functional block diagram of a typical prior art machine controller and sensory controller system; and

FIG. 7 is a functional block diagram of the integrated controller according to a preferred embodiment the present invention.

DETAILED DESCRIPTION OF THE PREFERRED AND ALTERNATE EMBODIMENTS

In describing the preferred embodiment of the present invention illustrated in the figures, specific terminology is employed for the sake of clarity. The invention, however, is not intended to be limited to the specific terminology so selected, and it is to be understood that each specific element includes all technical equivalents that operate in a similar manner to accomplish similar functions.

With regard to all such embodiments as may be herein described and contemplated, it will be appreciated that optional features, including, but not limited to, aesthetically pleasing coloration and surface design, and labeling and brand marking, may be provided in association with the present invention, all without departing from the scope of the invention.

To better understand the present system and method of this invention, a rudimentary knowledge of a typical injection molding machine and process is helpful. Therefore, referring first to FIGS. 1-3, a typical, conventional automated injection molding machine 10 is shown equipped with a mold 12 comprising two mold halves 14, 16, a sliding rod-type ejector system 18, and a CCD

heating the granular plastic 41 enough to melt it in the tube 44 to liquid or molten plastic 40, and a motor 54 for driving the auger 46.

As illustrated in FIG. 2, after the liquid or molten plastic 40 is injected into the mold 12 to fill the mold cavity 50, and after the plastic 40 in the mold cavity has solidified as described above, the ram 38 is actuated to pull the mold half 16 away from the mold half 14 so that the hard plastic part 22 can be ejected from mold cavity 50. Ejection of the hard plastic part 22, as mentioned above, can be accomplished by a variety of mechanisms or processes that can be made more efficient and effective by this invention, and the ejector system 18 illustrated in FIGS. 1-3 is but one example that is convenient for describing this invention. The ejector system 18 includes two slidable ejector rods 56, 58 that extend through the moveable platen 26 and through mold half 16 into mold cavity 50. When the mold 12 is closed for filling the mold cavity 50 with plastic 40, as shown in FIG. 2, the ejector rods 56, 58 extend to, but not into the mold cavity. However, when the mold 12 is opened, as shown in FIG. 3, an ejector actuator 60, which comprises two small hydraulic cylinders 62, 66 and a cross bar 68 connected to the ejector rods 56, 58, pushes the ejector rods 56, 58 into the mold cavity 50 to hit and dislodge the hard plastic part 22 and push it out of the cavity 50. Because one hit or push by the

the camera controller 70 to notify an operator to check the mold, clear any residual plastic or the hard plastic part 22 from the cavity 50 and mold 12, and then restart the plastic injection molding machine 10.

In the first state A illustrated in FIG. 4, the camera controller 70 sends a mold close signal to the machine controller 72, which in turn sends a mold close signal. In response, a close/open mechanism that includes a ram actuator actuates the ram 38 to close and press mold half 16 against the mold half 14 and followed by actuation of the plastic extrude system 42 to inject liquid or molten plastic into the mold 12 to form a plastic part. After allowing sufficient time for the plastic to harden, the process advances as indicated by arrow 76 to state B in which the ram 38 is actuated to pull mold half 16 away from mold half 14. When the mold 12 is open as illustrated in state B, an image of the open mold half 16 is acquired by electronic camera 20 and transmitted via electrical cable 78 to the camera controller 70, which digitizes and compares the image to an ideal image of the mold half 16 as it should appear with a properly formed plastic part 22 in the cavity. This comparison function of camera controller 70 is indicated in FIG. 4 by decision block 80. At this point in the sequence, there should be a fully formed hard plastic part 22 in mold half 16. Therefore, if the comparison at decision block 80 indicates that no plastic part 22

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

again at 92 to the ideal image of how the mold half 16 should appear with the part cleared. If the part 22 was successfully cleared by the last extension or cycle of the ejector pins 56, 58, the sequence proceeds as indicated by arrow 94 to state A. However, if the comparison at 92 indicates the part 22' is still stuck or not cleared, the camera controller 70 checks the number of tries at 98 and, if not more than the number, e.g., three (3), returns the sequence to state C again. The maximum number of tries set in decision 98 can be any number, but it is preferably set at a number, for example three (3), that is deemed to allow enough cycles or extensions of ejector rods 56, 58 to reasonably be expected to dislodge and clear the part 22 without becoming practically futile. Thus, multiple cycles of extensions and retractions of the ejector rods 56, 58 are available and used when the part 22 gets stuck, but unneeded repetitive cycles of the ejector rods 56, 58 are prevented when the part 22 has been dislodged and cleared from the mold.

By checking for a cleared mold half 16 with an empty cavity after every cycle or firing of the ejector system 18, rather than after every several firings, it is expected that the ejector system 18 will rarely have to be actuated or fired more than once in a part molding cycle, thus saving both time and wear. In production lines where an injection molding machine 10 is automatically cycled to continue producing plastic parts for

weeks and months on end, the saved time can be significant and can allow each injection molding machine 10 to produce many additional parts in a year. For example, if all the hard plastic parts get ejected by the first ejector stroke in nine out of ten molding cycles, and if the hard plastic parts are always ejected after five ejector strokes, then variable ejector cycling according to this invention could save at least thirty-six strokes when compared to ten fixed stroke cycles. Specifically, fifty strokes ($10 \text{ cycles} \times 5 \text{ strokes/cycle}$) minus fourteen strokes ($9 \text{ single strokes plus } 1 \times 5 \text{ strokes}$) equals thirty-six skipped ejector strokes.

As one can see from the above description, the overall injection molding process is extremely time sensitive. The present invention improves on this time sensitive and critical process by providing an integrated controller 100 that serves as both the sensor controller 70 and the machine controller 72. The integrated controller 100 is preferably a personal computer having serial, parallel and or USB ports for connecting data inputs. Known machine controller 72 programs are loaded into the integrated controller 100. One or more sensory devices 20 are connected directly to one or more preexisting serial, parallel or USB ports of the integrated controller 100. It should also be noted that data cards specific for the respective sensor 20 and having a interface port therein can be connected directly to the

bus of the CPU of the computer to provide a connection means for the sensor 20. By programming the integrated controller 100 or loading known software therein, the integrated controller 100 can receive the input signal(s)/data from the sensory devices 20, analyze the data, provide an output signal to the sensory devices 20 and communicate directly and contemporaneously with the preexisting machine controller 72 software. The above-described processes performed by the sensor controller 70 and the machine controller 72 can all now be performed by the integrated controller 100.

It should be noted that one skilled in the art with knowledge of the parameters and the desired result can program the integrated controller 100 to analyze data and provide the appropriate signals to control the machine 10.

Although the preferred embodiment of the present invention is described herein utilizing a camera sensor, any known sensory device such as, for exemplary purposes only, infrared sensors, ultrasonic sensors, or any other known sensing devices may be utilized.

Having thus described exemplary embodiments of the present invention, it should be noted by those skilled in the art that the within disclosures are exemplary only, and that various other

WHAT IS CLAIMED IS:

1. An integrated controller for use with a part-forming machine and a sensory device, comprising:

- a computer having at least one data interface;
- a program for controlling the part-forming machine; and
- a program for analyzing data from the sensory device and for communicating with said part-forming machine program,

wherein the sensory device is functionally communicatable with said at least one data interface of said computer, and wherein the part-forming machine is functionally communicatable with said at least one data interface of said computer.

2. The integrated controller of Claim 1, further comprising means for displaying information, said display means being in communication with said computer.

3. The integrated controller of Claim 1, wherein said at least one data interface of said computer is a bus.

4. The integrated controller of Claim 1, wherein said at least one data interface of said computer is a USB port.

5. The integrated controller of Claim 1, wherein said at least one data interface of said computer is a serial port.

6. The integrated controller of Claim 1, wherein said at least one data interface of said computer is a parallel port.

7. The integrated controller of Claim 1, wherein said computer has a first data interface and a second data interface, wherein the sensory device is functionally communicatable with said first data interface of said computer, and wherein the part-forming machine is functionally communicatable with said second data interface of said computer.

8. An integrated controller for use with an injection-molding machine and a sensory device, comprising:

a computer having a data interface;

a program for analyzing data from the sensory device and controlling the injection-molding machine and the sensory device in response to the sensory device data; and

means for displaying information, said display means being in communication with said computer, wherein the sensory device is functionally communicatable with said data interface of said computer, and wherein the injection-molding machine is functionally communicatable with said data interface of said computer.

9. The integrated controller of Claim 8, wherein said data interface of said computer is a bus.

10. The integrated controller of Claim 8, wherein said data interface of said computer is a USB port.

11. The integrated controller of Claim 8, wherein said data interface of said computer is a serial port.

12. The integrated controller of Claim 8, wherein said data interface of said computer is a parallel port.

13. The integrated controller of Claim 8, wherein said computer has a first data interface and a second data interface, wherein the sensory device is functionally communicatable with said first data interface of said computer, and wherein the part-forming machine is functionally communicatable with said second data interface of said computer.

14. The integrated controller of Claim 8, wherein said display device is a monitor.

15. The integrated controller of Claim 8, wherein said display device is a printer.

16. An integrated controller for use with an part-forming machine, comprising:

a computer having a data interface;

a sensory device in communication with said data interface of said computer, said sensory device outputting sensory data to said computer via said data interface;

a program for analyzing said sensory data from said sensory device and controlling the part-forming machine and said sensory device in response to said sensory data; and

means for displaying information, said display means in communication with said computer, wherein said sensory device functionally communicates with said data interface of said computer, and wherein the injection-molding machine is functionally communicatable with said data interface of said computer.

17. The integrated controller of Claim 16, wherein said sensory device is at least one vision sensor.

18. The integrated controller of Claim 16, wherein said sensory device is at least one infrared sensor.

19. The integrated controller of Claim 16, wherein said sensory device is at least one air pressure sensor.

20. The integrated controller of Claim 16, wherein said sensory device is at least one vacuum sensor.

21. The integrated controller of Claim 16, wherein said sensory device is at least one ultrasonic sensor.

22. The integrated controller of Claim 16, wherein said display device is a monitor.

23. The integrated controller of Claim 16, wherein said display device is a printer.

24. The method of controlling a part-forming machine, comprising the steps of:

a. using a sensory device to collect data regarding the condition of the part-forming machine;

b. communicating said data with a computer having a program to analyze said data and to generate data commands for controlling the part-forming machine; and

c. communicating said data commands to the part-forming machine.

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

[illegible]

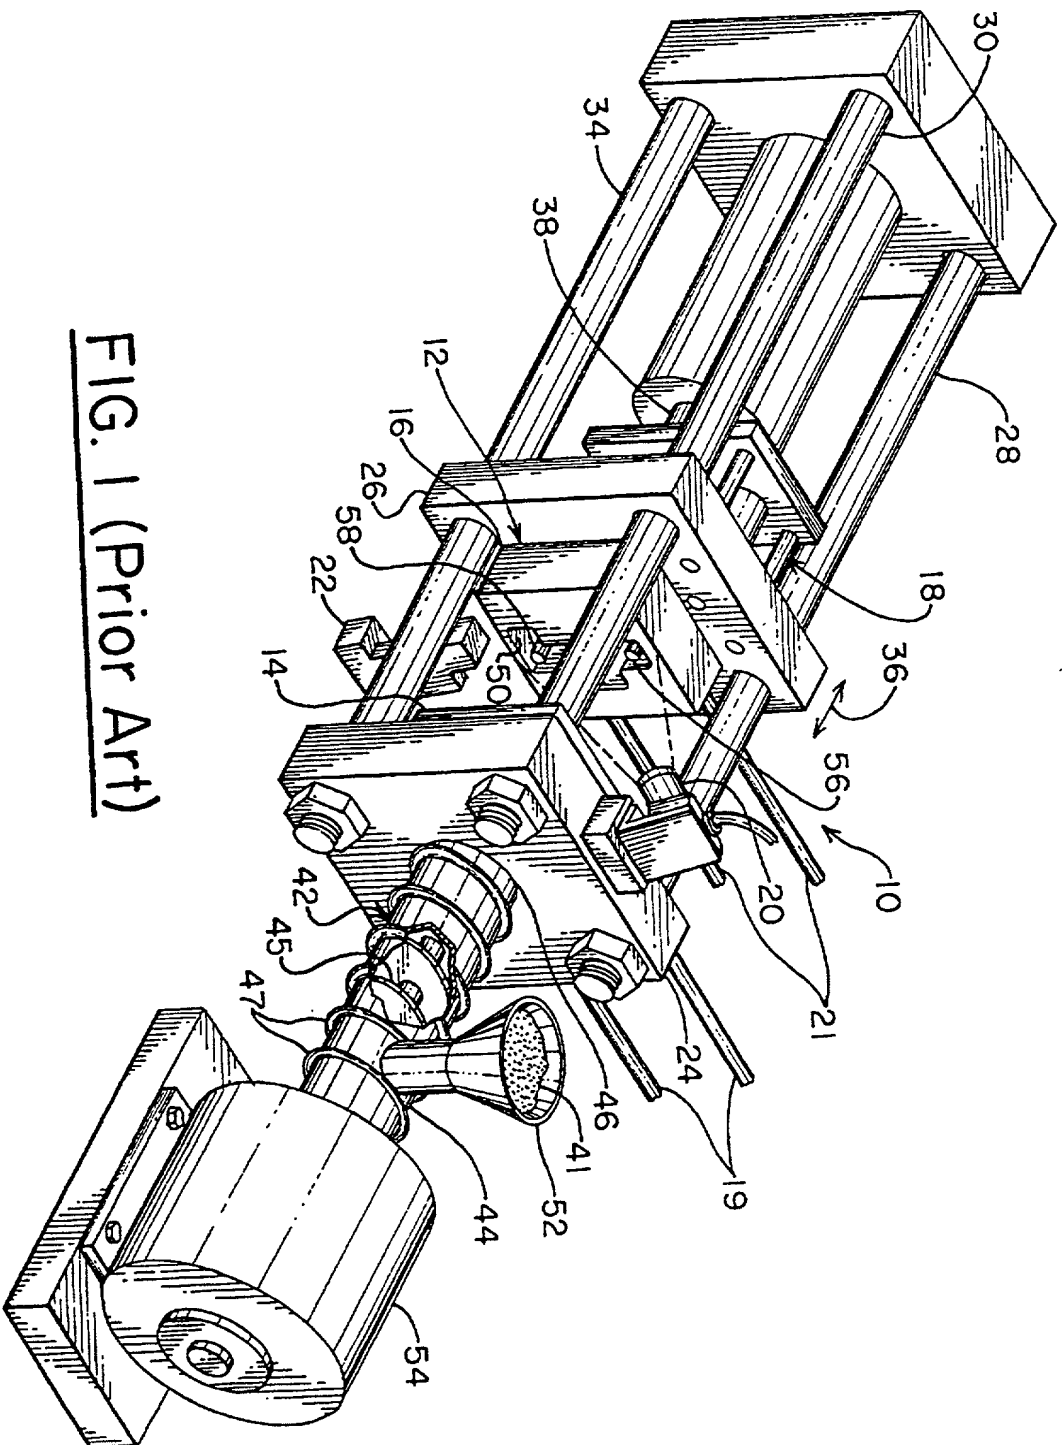


FIG. 1 (Prior Art)

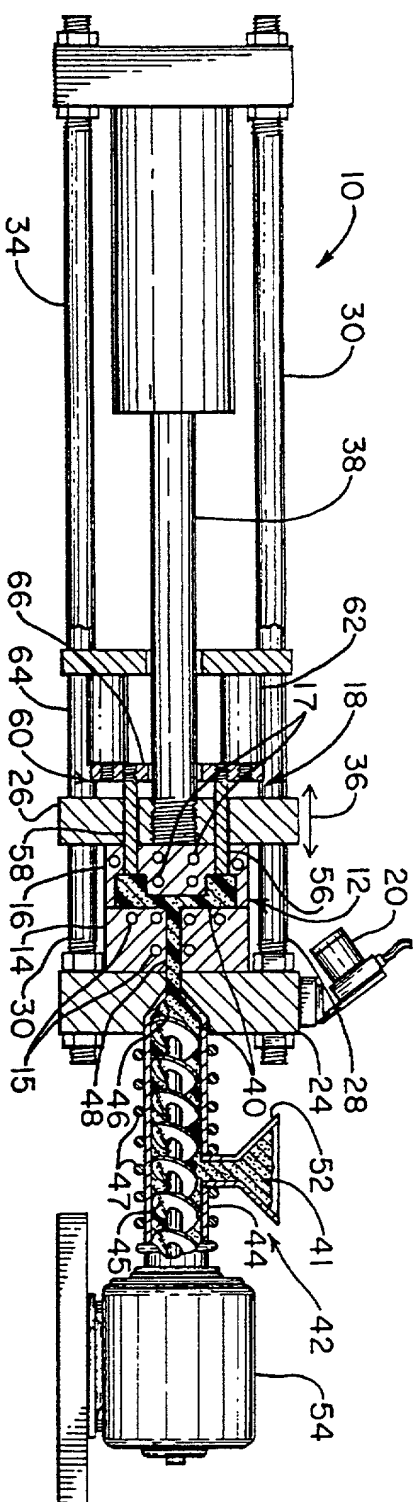


FIG. 2 (Prior Art)

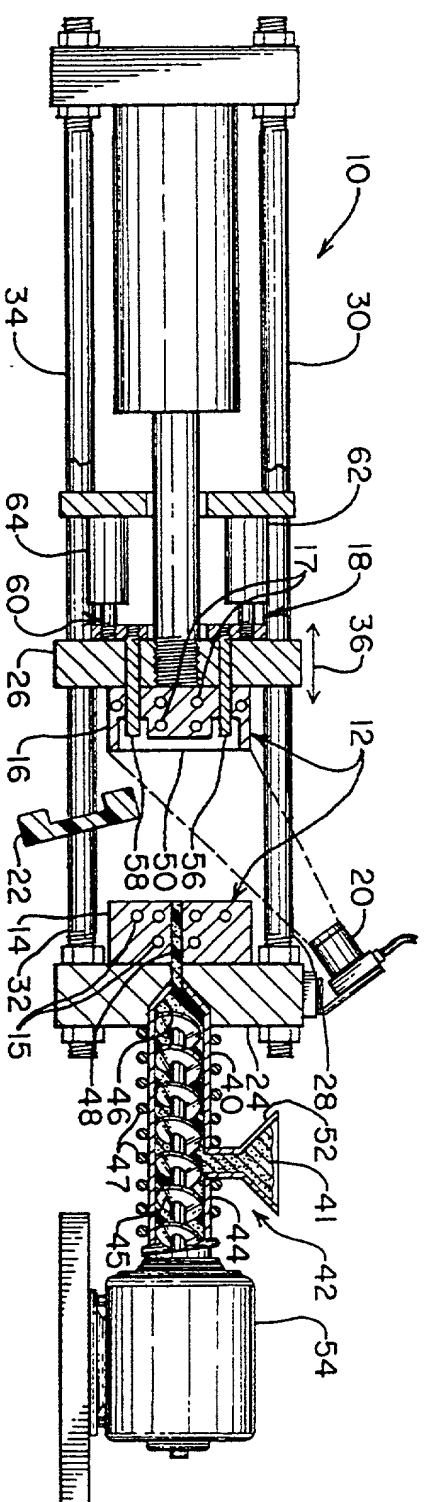


FIG. 3 (Prior Art)

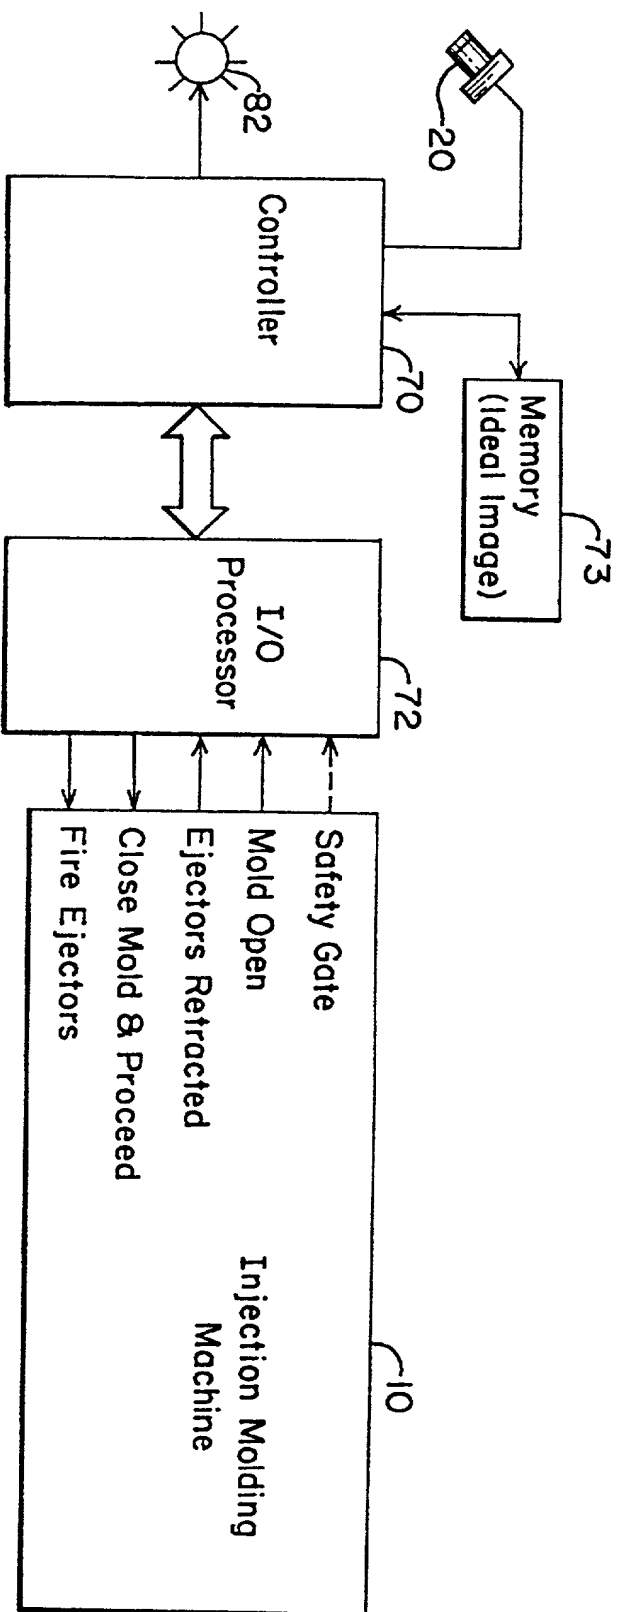


FIG. 5 *(Prior Art)*

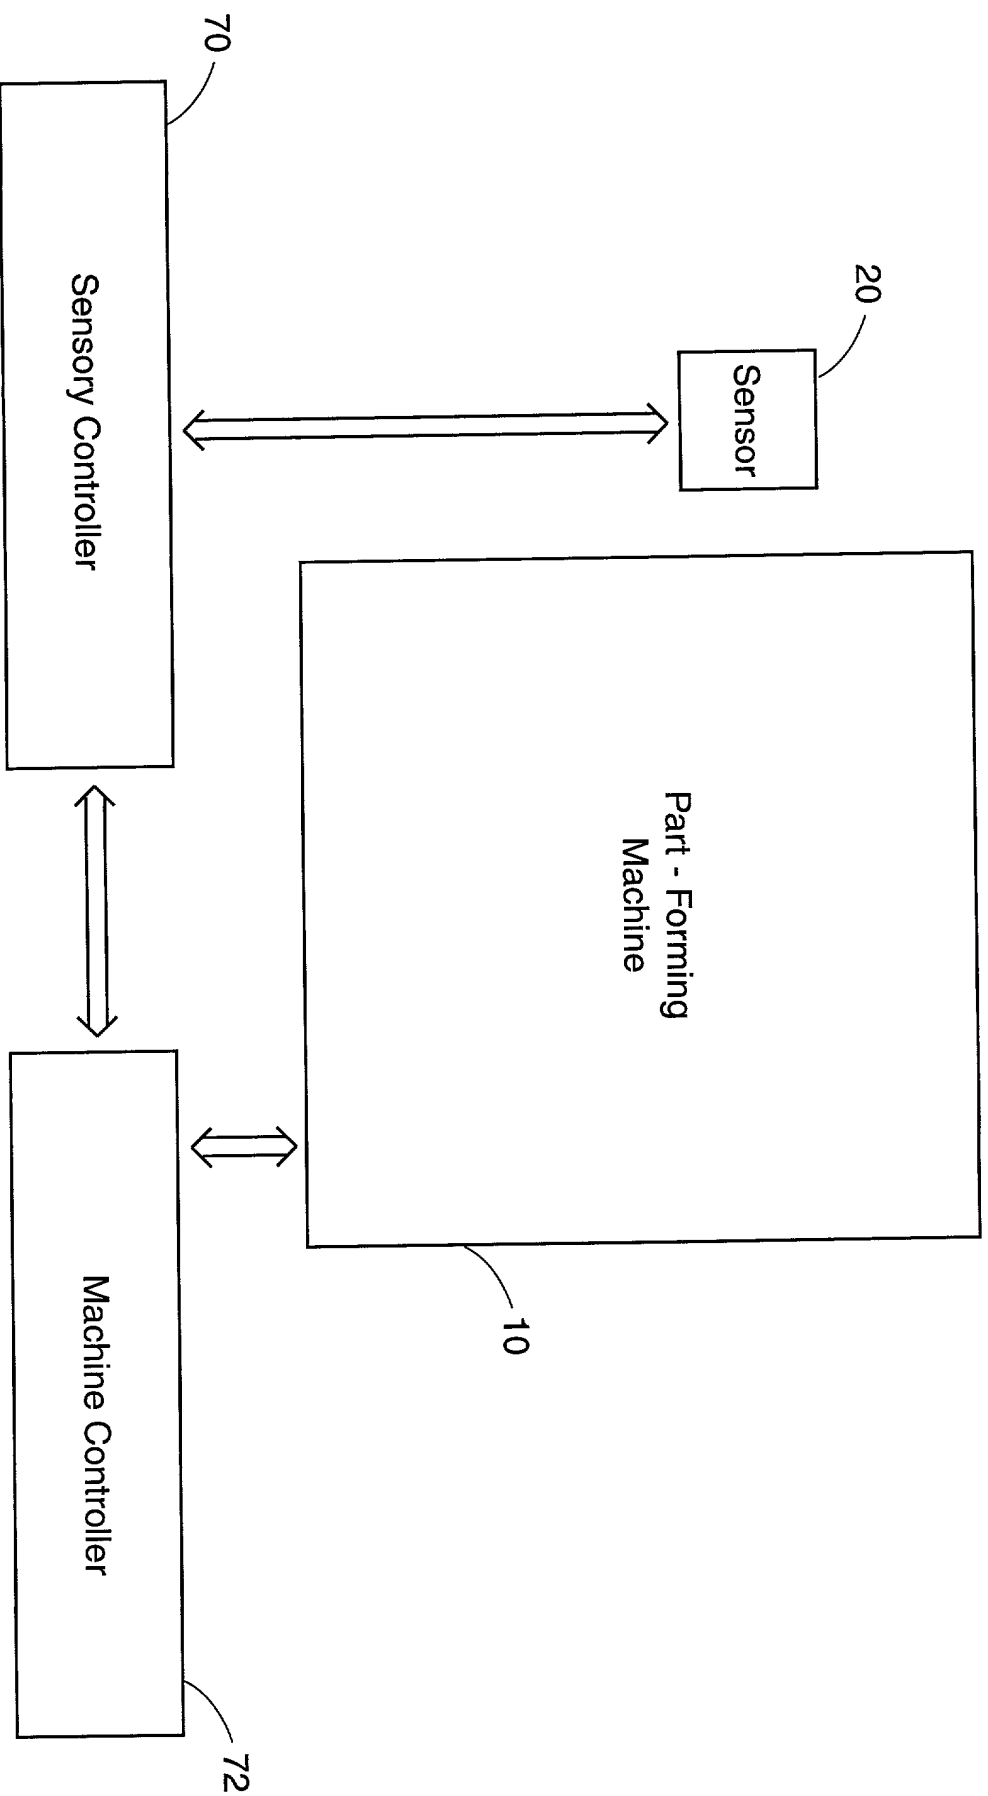


FIG. 6 (Prior Art)

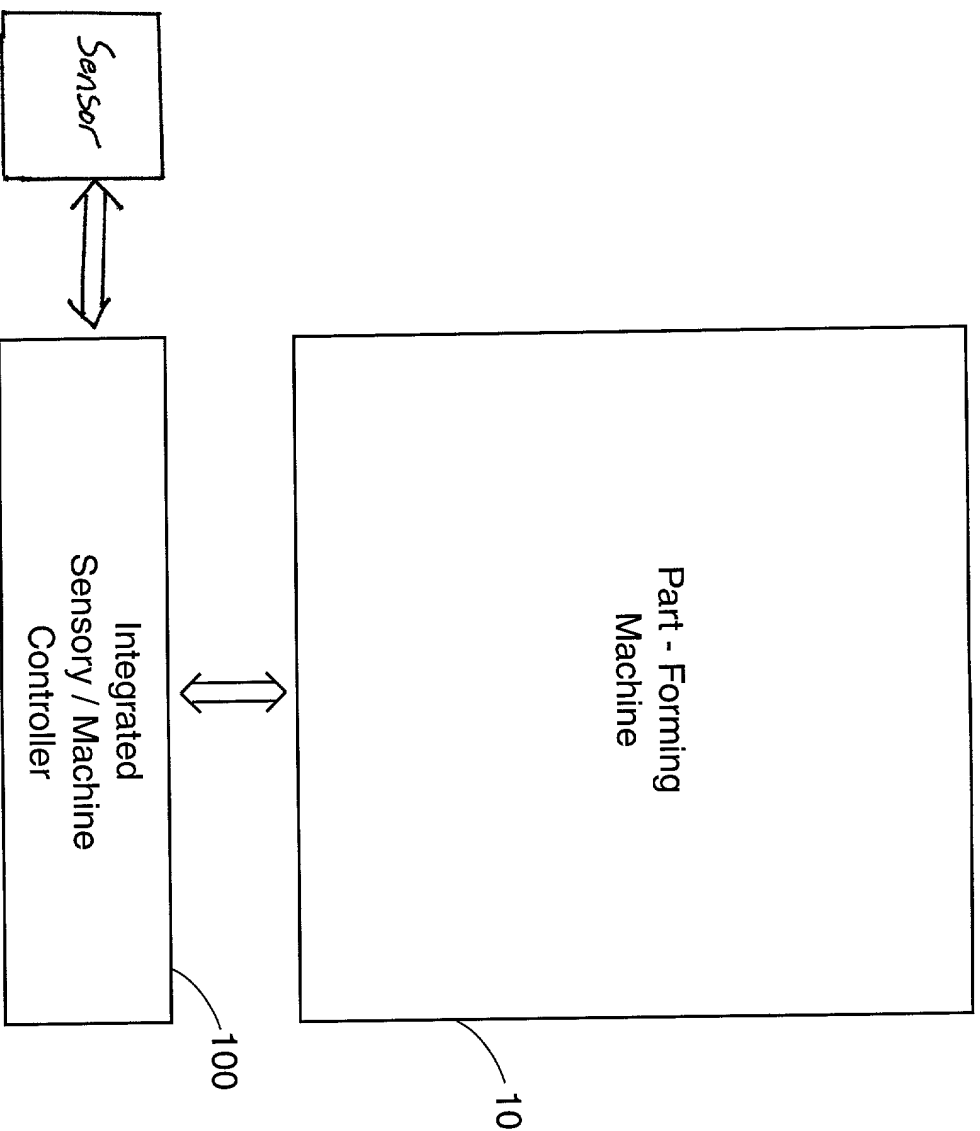


FIG. 7

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	2000-1220-RA
	First Named Inventor	Kachnic et al.
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PART-FORMING MACHINE CONTROLLER HAVING INTEGRATED SENSORY AND ELECTRONICS AND METHOD THEREOF

the specification of which
☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) [] as United States Application Number or PCT International Application Number [] and was amended on (MM/DD/YYYY) [] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application in which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)
60/212518	06/19/2000

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Approved for use through 8/30/00. OMB 0851-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(d) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number
Joel D. Myers	44,253		
Sandra M. Sovinski	45,781		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☒ Correspondence address below

Name	Joel D. Myers, Esq.				
Address	Myers & Associates, Intellectual Property Law, P.C.				
Address	5763 Mason Jones Drive				
City	Powder Springs	State	GA	ZIP	30127
Country	USA	Telephone	770-222-2506	Fax	770-222-2506

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))		Family Name or Surname			
Edward F.		Kachnic			
Inventor's Signature	Edward F. Kachnic			Date	08-16-00
Residence: City	Douglasville	State	GA	Country	USA
Post Office Address	4026 Hickory Nut Drive				
Post Office Address					
City	Douglasville	State	GA	ZIP	30135
				Country	USA


☒ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a
valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 1 of 1

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle (if any))				Family Name or Surname			
Benjamin J.				Pryhoda			
Inventor's Signature						Date	08-16-00
Residence: City	Lafayette	State	CO	Country	USA	Citizenship	USA
Post Office Address 530 Arbor Drive							
Post Office Address							
City	Lafayette	State	CO	ZIP	80026	Country	USA
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.